
## Wenger

## Legacy<sup>®</sup> Select Acoustic Tower

- 6' (1829 mm) wide panels.
- Panels are constructed of 3/4" (19 mm) honeycomb core with 3/16" (5 mm) thick laminated hardboard skin on front and back. Overall panel thickness is 1-1/8" (29 mm).
- Panels are curved at a 10' (3048 mm) radius to provide proper diffusion of sound.
- Top Panel folds for storage using gas assists and a tool to raise and lower the shell.
  Top Panel folds at 61" (1549 mm) from top of tower.
- · Base and Shell Frame are constructed of black powder-coat painted steel.
- Base includes a rear counterweighted design.
- Shell tower is 11' 6" (3505 mm) high.
- Shell tower rolls through 34" wide x 80 high" (864 x 2032 mm) door opening in the folded Storage Position.
- Includes four swivel, non-marring rubber casters for easy movement.
  4" dia (102 mm) casters at the front and 3" dia (76 mm) casters at the back.
- Bottom Filler Panel is removable and rests 2" (51 mm) from floor.
  Bottom Filler Panel is stored in back of shell.
- Front Panel finishes are available in solid colors and selected woodgrain laminates.
- · Back Panel finish is painted black.
- Overall shell surface coverage is 60 ft<sup>2</sup> (5.6 m<sup>2</sup>) at 12' (3.7 m) height.
- Shells nest compactly at 21" (533 mm) per unit at 11' 6" (3505 mm) height.
- · Shipped assembled.
- Five-year warranty.
- · Set up videos are available at www.wengercorp.com.
- Environmental attributes and LEED compliance for this product can be found at www.wengercorp.com/GREEN or by contacting your Wenger representative.





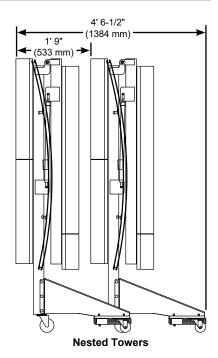



Storage Position Easy Setup

**Performance Position** 







© 2019 Wenger Corporation USA/2019-05/W



WENGER CORPORATION

Phone 800.4WENGER (493-6437) Worldwide +1.507.455.4100 | Parts & Service 800.887.7145 | Canada Office 800.268.0148 | wengercorp.com 555 Park Drive, PO Box 448 | Owatonna MN 55060-0448